



- MINI - ANSI
- CATALOGUE
- 2024

INNOVATING SAFETY



SECURE FIRST™

FALL PROTECTION EQUIPMENTS



Your Valuable Life in Secure Hands



A Government Recognized Star Export House

CELEBRATING 29 YEARS 1994-2024
QUALITY | SERVICE | PROFESSIONALISM





(An ISO 9001 : 2015 Certified Company)

A Government Recognized Star Export House

Fall Protection Equipments

OUR ADVANTAGE



SCAN FOR FULL CATALOGUE



SCAN FOR CORPORATE VIDEO



VIRAJ TALON SERIES

New ANSI Standards for Fall Protection SRLs

ANSI/ ASSP Z 359.14-2021 standard has been recently updated to minimize confusion in the market as to proper use of Self-Retracting Lifelines (SRLs) in relation to anchor height requirements. VIRAJ has all ready started manufacturing of SRLs in new Class 1 / Class 2 standard.



Classification Changes

SRLs will now be classified by two new class ranges: Class 1 and Class 2. The table below identifies Class 1 SRLs that are only to be used only on overhead anchorages and are subjected to a max free fall of 2 feet or less.

Class 2 SRLs can only be used in applications where overhead anchorages may not be accessible and a structural edge is used instead; these can withstand a free fall of no more than 6.0 feet over an edge.

ANSI Z359.14-2014 (Old)	ANSI Z359.14-2021 (New)
Class A -Tested overhead with 282 lb. weight -Must arrest fall within 24 -Average force less than 1,350 lbs.	Class 1 -Tested overhead with 310 lb. weight -Must arrest fall within 42 -Average force less than 1,350 lbs.
Class B -Tested overhead with 282 lb. weight -Must arrest fall within 54 -Average force less than 900 lbs.	Class 2 -Meets Class 1 standards -Tested at foot level with 310 lb. weight -Arrest distance printed on label and instructions

SRLs must have Class 1 or Class 2 clearly labeled on the product as per the image below.



Also included in the ANSI Z359.14-2021 standard are testing requirements for a SRL-P, which is a self-retracting lanyard worn by the user on a full-body harness to be used as a fall arrest connector.



VIRAJ ADVANTAGE



LOCKING BRAKES MADE OF FORGED BRASS

INTERNAL ENERGY ABSORPTION MECHANISM

POWER COIL SPRING MADE WITH HIGH CARBON STEEL WITH GERMAN TECHNOLOGY

DESIGNED TO TAKE 310 lbs LOAD

EASY SERVICING

WIRE DRUM MADE OF ALUMINUM PRESSURE DIE CASTING

SNOUT TO REDUCE THE BACK IMPACT ON RETRACTION

SWIVEL HOOK (FORGED STEEL ALLOY) HIGH STRENGTH ZINC PLATED HAVING STRENGTH > 5000 lbs AND OPENING 71".

ALUMINUM FORGED ANODIZE ANCHORAGE EYE WITH SWIVEL MOVEMENT TO AVOID TWIST IN ROPE WHILE WORKING AND RETRACTION

HIGH IMPACT STRENGTH POLYAMIDE ROBUST CASING TO PREVENT FROM BREAKAGE

VINYL LAMINATED STICKER WITH PREPRINTED BATCH & SERIAL NO.

INBUILT CASING HANDLE FOR EASY HANDLING

WEATHERPROOF HARDWARE

SHOCK ABSORBER ASSEMBLY TO REDUCE THE BACK IMPACT ON FREE REPARATION

GALVANIZED WIRE STEEL ROPE (STRONG & FLEXIBLE) WITH MINIMUM BREAKING STRENGTH OF 3600 lbs

G.I. THIMBLE

LOAD / FALL INDICATOR

★ As Per ANSI Z359:14-2021 And Horizontal Usage ANSI Z359:14-2021 SRL-LE

★ Wire Rope Blocks Available In Length Of 10 Ft. To 100 Ft.

★ Webbing Rope Blocks Available In Length of 6 Ft. To 40 Ft.

★ Compact Dimensions and Light/weight for Easy Handling of Unit.

NOW CHOOSE THE TALON-MINI (SRL) AS PER YOUR REQUIREMENT

ALPHA Block can be used with a variety of different hooks and connectors at both its ends offering high level of flexibility of use to the wearer.

ANCHOR END

Stainless Steel Triple Action Locking Karabiner (SF-1105ATSS)




Steel Quarter Turn Locking Karabiner (SF-1101 A)



Aluminium Quarter Turn Locking Karabiner (SF-1903 A)



Twin SRL Connector (SF-1700)



Twin SRL Connector (SF-1609)



Front View



Back View



Steel Snap Hook (SF-1406)



Aluminium Karabiner Tipline Lock with Swivel (SF-1115)



Steel Swivel Snap Hook with Load Indicator (SF-1404) (S)



Aluminium Rebar Hook Forged (SF-1509)





Steel Rebar Hook Stamped (SF-1607)

HOOK/LIFELINE END OPTIONS


TALON-MINI (SRL-P)

The Lightest Self Retractable Life Line (SRL) in its range With tough & long-lasting casing, this is TALON-MINI extremely light in weight & easy to carry. It is made up of finest material for durability and Comprehensive use.

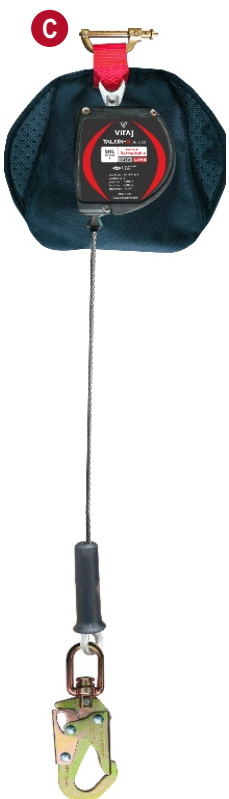

Model	Length	Description	Weight (lbs)
A SF-RFA-6W FT	6 FT.	Steel Swivel Snap Hook; comes with locking carabiner SF-1101A	2.866
A2 SF-RFA-2X6W FT	6 FT.	Steel Swivel Snap Hook; comes with Twin SRL Connector SF-1700	6.052
B SF-RFA-8W FT to 8.5W FT	8 FT. & 8.5 FT	Steel Swivel Snap Hook; comes with Twin SRL Connector SF-1700	3.740
B2 SF-RFA-2X8W FT to 8.5W FT	8 FT. & 8.5 FT	Steel Swivel Snap Hook; comes with Twin SRL Connector SF-1700	6.530
C SF-RFA-8 FT to 8.5 FT	8 FT. & 8.5 FT	Steel Swivel Snap Hook; comes with Twin SRL Connector SF-1700	4.189
C2 SF-RFA-2X8 FT to 8.5 FT	8 FT. & 8.5 FT	Steel Swivel Snap Hook; comes with Twin SRL Connector SF-1700	7.495


Scan for Full Technical Data Sheets

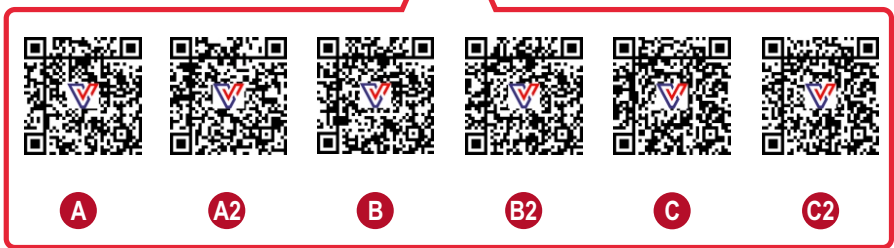

TALON-X SRL Series with wire/cable | Overhead Use

	Model	Length	Description	Weight (lbs)
A	SF-RFA-10 FT	10 ft	Steel Swivel Snap Hook; comes with locking carabiner SF-1101A	5.202
B	SF-RFA-15 FT (N) to 20 FT (N)	15 ft to 20 ft	Steel Swivel Snap Hook; comes with locking carabiner SF-1101A	6.900
C	SF-RFA-15 FT to 30 FT	15 ft to 20 ft	Steel Swivel Snap Hook; comes with locking carabiner SF-1101A	9.435
D	SF-RFA-40 FT to 60 FT	40 ft. to 60 ft	Steel Swivel Snap Hook; comes with locking carabiner SF-1101A	15.586
E	SF-RFA-60 FT (N)	60 ft	Steel Swivel Snap Hook; comes with locking carabiner SF-1101A	27.690
F	SF-RFA-70 FT to 100 FT	70 ft to 100 ft	Steel Swivel Snap Hook; comes with locking carabiner SF-1101A	27.954

Class
1
Anchor at or above dorsal D-ring

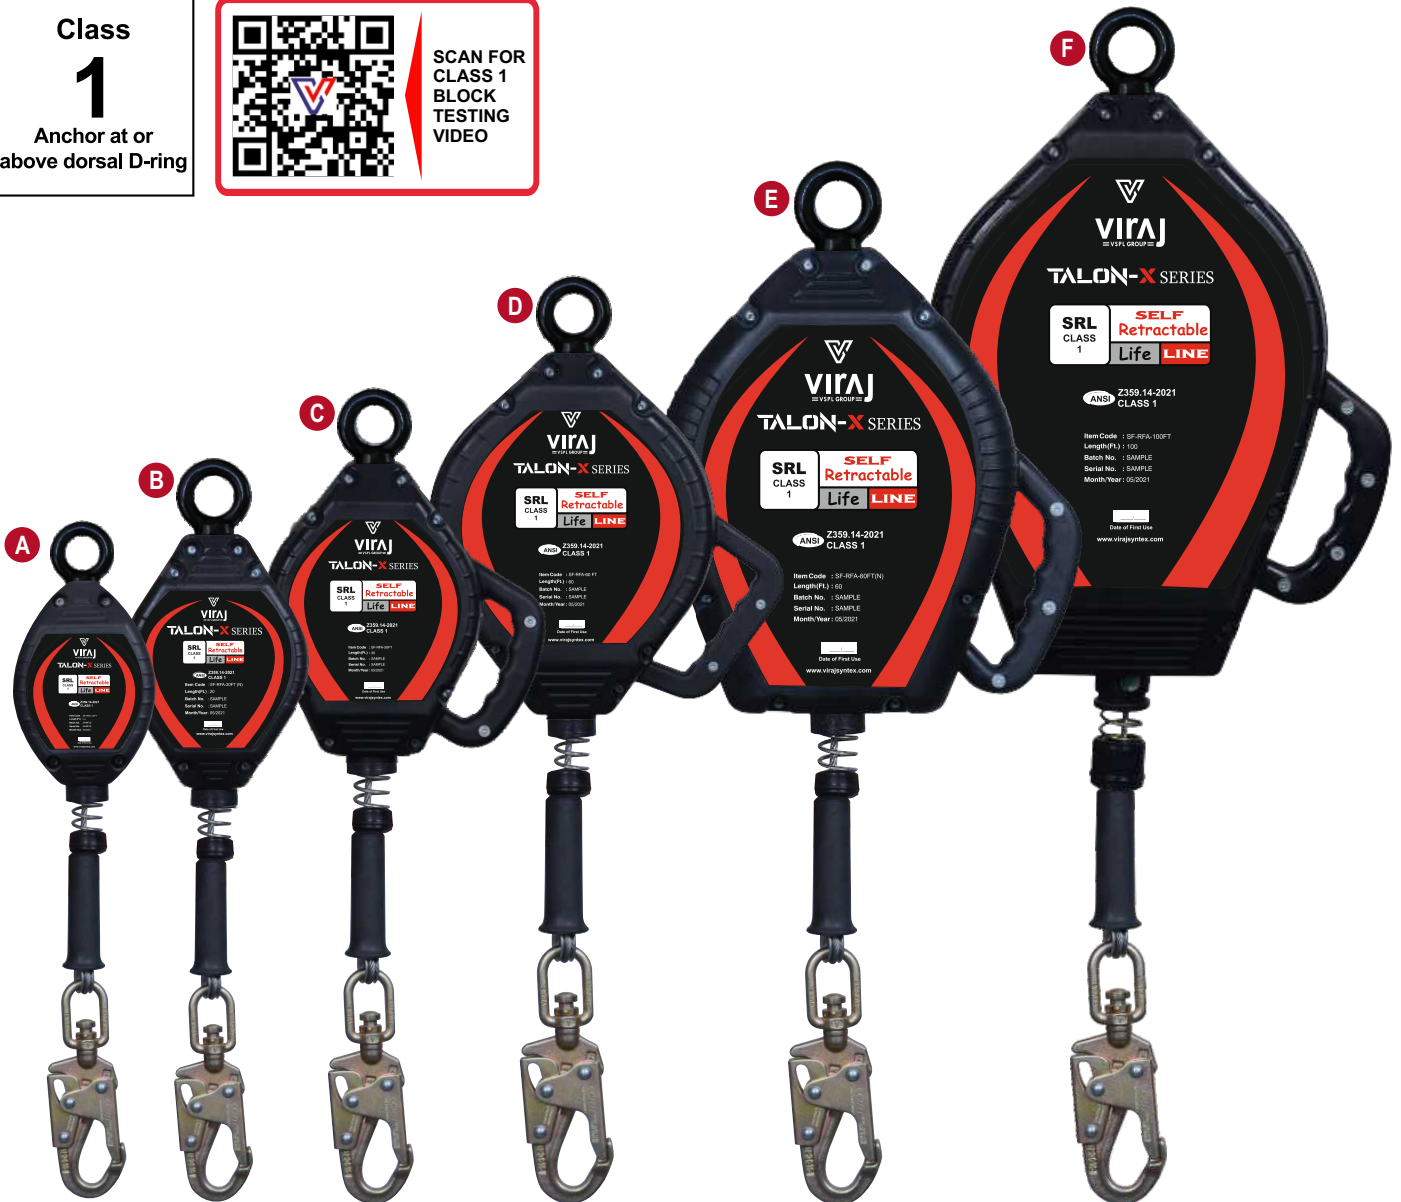

Scan for Full Technical Data Sheets



TALON-X SRL Series with Webbing | Overhead Use

	Model	Length	Description	Weight (lbs)
G	SF-RFA-11W FT	11 ft	Steel Swivel Snap Hook; comes with locking carabiner SF-1101A	4.050
H	SF-RFA-15W FT (N) to 20W FT (N)	15 ft to 20 ft	Steel Swivel Snap Hook; comes with locking carabiner SF-1101A	5.434
I	SF-RFA-15W FT to 25W FT	15 ft to 25 ft	Steel Swivel Snap Hook; comes with locking carabiner SF-1101A	7.495
J	SF-RFA-30W FT to 40W FT	30 ft. to 40 ft	Steel Swivel Snap Hook; comes with locking carabiner SF-1101A	13.007


Class
1
Anchor at or above dorsal D-ring




Scan for Full Technical Data Sheets



TALON-MINI-LE (SRL-P) | Wire/Cable | Personal Use




Scan for Full Technical Data Sheets

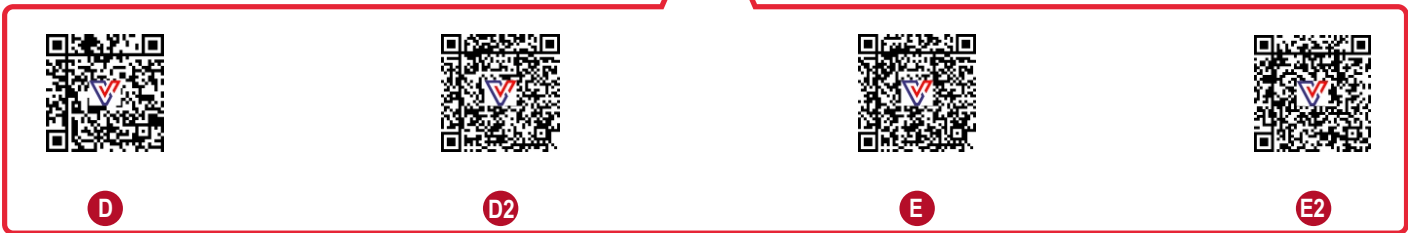

Model	Length	Description	Weight (lbs)	
D	SF-RFA-LE-8 FT to 8.5 FT	8 ft. & 8.5ft	Steel Swivel Snap Hook; comes with Twin SRL Connector SF-1700	4.189
D2	SF-RFA-LE-2X8 FT to 8.5 FT	8 ft. & 8.5ft	Steel Swivel Snap Hook; comes with Twin SRL Connector SF-1700	7.495
E	SF-RFA-LE-8 FT to 8.5 FT	8 ft. & 8.5ft	Steel Swivel Snap Hook; comes with Twin SRL Connector SF-1700	6.172
E2	SF-RFA-LE-2X8 FT to 8.5 FT	8 ft. & 8.5ft	Steel Swivel Snap Hook; comes with Twin SRL Connector SF-1700	11.243

TALON-LE (SRL-P) | Webbing | Personal Use




Scan for Full Technical Data Sheets




	Model	Length	Description	Weight (lbs)
F	SF-RFA-LE-6W FT	6 ft.	Steel Swivel Snap Hook; comes with Twin SRL Connector SF-1700	3.748
F2	SF-RFA-LE-2X6W FT	6 ft.	Steel Swivel Snap Hook; comes with Twin SRL Connector SF-1700	6.393
G	SF-RFA-LE-8W FT to 8.5W FT	8 ft. & 8.5ft	Steel Swivel Snap Hook; comes with Twin SRL Connector SF-1700	3.740
G2	SF-RFA-LE-2X8W FT to 8.5W FT	8 ft. & 8.5ft	Steel Swivel Snap Hook; comes with Twin SRL Connector SF-1700	6.530

TALON-LE | Wire/Cable | Overhead Use




Scan for Full Technical Data Sheets

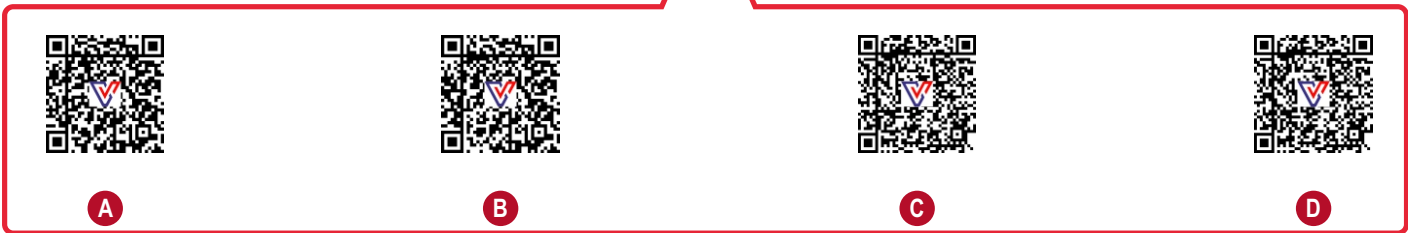

	Model	Length	Description	Weight (lbs)
A	SF-RFA-LE-10,15 FT	10 ft & 15 ft	Steel Swivel Snap Hook; comes with locking carabiner SF-1101A	7.420
B	SF-RFA-LE-10,15,20 FT	10 ft, 15 ft & 20 ft	Steel Swivel Snap Hook; comes with locking carabiner SF-1101A	9.360
C	SF-RFA-LE-30,40,50 FT	30 ft, 40 ft & 50 ft	Steel Swivel Snap Hook; comes with locking carabiner SF-1101A	16.314
D	SF-RFA-LE-60,70,80 FT	60 ft, 70 ft & 80 ft	Steel Swivel Snap Hook; comes with locking carabiner SF-1101A	28.660

TALON-R | Wire/Cable | Overhead Use

Class
1
Anchor at or above dorsal D-ring



Scan for Full Technical Data Sheets



	Model	Length	Description	Weight (lbs)
A	SF-RFA-40 FT R to 60 FT R	40 ft to 60 ft	Steel Swivel Snap Hook; comes with locking carabiner SF-1101A	20.943
B	SF-RFA-80 FT R to 100 FT R	80 ft to 100 ft	Steel Swivel Snap Hook; comes with locking carabiner SF-1101A	33.730

Tripod , Winch & Retrieval SRL (Combo)




SCAN FOR TRIPOD SEQUENCE VIDEO



SCAN FOR TECHNICAL DATA SHEETS




ABOVE SET CONTAINS



(01)
Tripod 7FT or 10FT
Double Pulley Head
SF-TP-800(DP)



(03)
Mounting Bracket
for Retrieval SRL
SF-17(26)



(05)
Mounting Bracket
for Winch
SF-800(SP/DP)



(02)
Retrieval SRL
SF-RFA-60R FT or
SF-RFA-100R FT



(04)
Winch
SF-WN-801
65 FT or 130 FT



(06)
Tripod Bag
SF-KB-904



Technical Data Sheets



SF-FBH-155-1D



Technical Data Sheets



SF-FBH-155-1G



Technical Data Sheets



SF-FBH-155-2D



Technical Data Sheets



SF-FBH-155-2G



Item Code	SF-FBH-155-1D	SF-FBH-155-1G	SF-FBH-155-2D	SF-FBH-155-2G
Point adjustability	3	3	5	5
Breaking strength	3600 lbs	3600 lbs	3600 lbs	3600 lbs
Standard	ANSI Z359.11 - 2021	ANSI Z359.11 - 2021	ANSI Z359.11 - 2021	ANSI Z359.11 - 2021
Grommet	No	Yes	No	Yes
Weight	2.43 lbs	2.54 lbs	2.87 lbs	2.98 lbs



Technical Data Sheets



SF-FBH-155-3D



Technical Data Sheets



SF-FBH-155-3G



Technical Data Sheets



SF-FBH-155-4D



Technical Data Sheets



SF-FBH-155-4G



Item Code	SF-FBH-155-3D	SF-FBH-155-3G	SF-FBH-155-4D	SF-FBH-155-4G
Point adjustability	5	5	4	4
Breaking strength	3600 lbs	3600 lbs	3600 lbs	3600 lbs
Standard	ANSI Z359.11 - 2021	ANSI Z359.11 - 2021	ANSI Z359.11 - 2021	ANSI Z359.11 - 2021
Grommet	No	Yes	No	Yes
Weight	3.97 lbs	3.53 lbs	3.20 lbs	3.31 lbs

HIGHLINE

Meets applicable ANSI, OSHA and CSA Standard ANSI Z359.11-2021 and CSA 259.10-12



Technical Data Sheets



SF-FBH-1511



Technical Data Sheets



SF-FBH-1512



Technical Data Sheets



SF-PNT-15-11G



Technical Data Sheets



SF-PNT-15-12G



Item Code	SF-PNT-1511	SF-PNT-1512	SF-PNT-15-11G	SF-PNT-15-12G
Point adjustability	5	6	5	6
Breaking strength	3600 lbs	3600 lbs	3600 lbs	3600 lbs
Standard	ANSI Z359.11 - 2021	ANSI Z359.11 - 2021	ANSI Z359.11 - 2021	ANSI Z359.11 - 2021
Grommet	No	Yes	Yes	Yes
Weight	4.19 lbs	5.30 lbs	4.30 lbs	5.41 lbs



> Ref: SF-FAP-31099 (6 & 12) <

Length - Y Leg Lanyard 6ft & 12ft
 Description - with 6 ft Fall Shock Absorbing Pack Breaking strength of Webbing : 6000 lbs
 Connectors - Steel Stamped snap Hook SF-1406 at attachment end and Steel stamped Rebar Hook SF-1607 at anchorage end
 Weight : 4.85 lbs.



> Ref: SF-FAP-31098 (6 & 12) <

Length - Y Leg Lanyard 6ft & 12ft
 Description - with 6 ft & 12 ft. Fall Shock Absorbing Pack Breaking strength of Webbing : 6000 lbs
 Connectors - Steel Stamped snap Hook SF-1406 both side, Weight : 4.70 lbs.



> Ref: SF-FAP-32099 (6 & 12) <

Length - Y Leg Lanyard 6ft & 12ft
 Description - with 6 ft Fall Shock Absorbing Pack Breaking strength of Webbing : 6000 lbs
 Connectors - Steel Stamped snap Hook SF-1406 at attachment end and Steel stamped Rebar Hook SF-1607 at anchorage end
 Weight : 4.41 lbs.



> Ref: SF-FAP-3108 (6 & 12) <

Length - 6ft & 12ft
 Description - with 6 ft & 12 ft. Fall Shock Absorbing Pack Breaking strength of Webbing : 6000 lbs
 Connectors - Steel Stamped snap Hook SF-1406 both side, Weight : 3.50 lbs.



> Ref: SF-FAP-3208 (6 & 12) <

Length - Y Leg Lanyard 6ft & 12ft
 Description - with 6 ft Fall Shock Absorbing Pack Breaking strength of Webbing : 6000 lbs
 Connectors - Steel Stamped snap Hook SF-1406 at attachment Both Side and
 Weight : 3.00 lbs.



> Ref: SF-FAP-3209 (6 & 12) <

Length - 6ft & 12ft
 Description - with 6 ft Fall Shock Absorbing Pack Breaking strength of Webbing : 6000 lbs
 Connectors - Steel Stamped snap Hook SF-1406 at attachment end and Steel stamped Rebar Hook SF-1607 at anchorage end
 Weight : 3.31 lbs.



> **Ref: SF-TL-1002** <

Polyester Elasticated Webbing 0.78”
 Lock Stitching at both ends for extra security
 Mini Aluminium Karabiners for corrosion resistance
 Adjustable barrel lock for tool attachment
 Strength of Tool Lanyard : 22 lbs.
 Length 35 - 42 " at full extension
 Colour : Orange webbing with centre black line or As required..
 Weight : 0.12 lbs.



> **Ref: SF-TL-1004** <

This Lanyard comes as a black colored 0.78” mm tubular webbing having a relaxed length of 33.5”(so that the Lanyard does not unnecessarily come in the way while working), and extended length of 53.14” (to allow maximum reach while using the tool).
 The Y-shaped Lanyard allows the user to attach and carry 2 tools.
 Weight : 0.14 lbs.



> **Ref: SF-ST-01** <

Extremely effective; specially designed to help relieve the negative effects of Suspension Trauma.
 Compact and Light-weight. Does not hamper with the activity of the worker while at work.
 Allows the suspended worker to stand up in his harness to relieve pressure.
 Easy to attach to the Harness with the help of the textile loop and velcro provided. Easy deployment; operation is fool-proof. VIRAJ provides Harnesses fitted with the Suspension Intolerance straps on request.
 Weight : 0.23 lbs.



> **Ref: SF-ES-8005 N** <

Made up of 1.73” wide Polyester Webbing
 Length : 3 ft, 4 ft, & 6 ft or as requested.
 Having a D-Ring at one end and textile loop at the other end. Also provided with a polyester covering on the load-bearing webbing
 As per ANSI Z359.18-2017 TYPE T & OSHA.
 Weight : 1.11 lbs.



> **Ref: SF-ES-8006** <

Made up of 1.73” wide Polyester Webbing
 stitched with 2.75” webbing on the back for extra protection.
 Length : 3 ft, 4 ft, & 6 ft or as requested.
 Having a small D-ring on one end & a bigger D-ring on the other.
 As per ANSI Z359.18-2017 TYPE T & OSHA.
 Weight : 1.17 lbs.



> **Ref: SF-ES-8009** <

Made up of 2” wide Polyester Webbing
 Length : 3 ft, 4 ft, & 6 ft or as requested.
 As per ANSI Z359.18-2017 TYPE T & OSHA.
 Weight : 0.95 lbs.



> **Ref: SF-EL-01** <

Made of 1.18" wide polyester webbing
 Provided with SF-1406 & SF-DR-016
 for making connection.
 Ideal for extending dorsal D-Ring for
 easy connection.
 Length :- 18 inches
 Weight : 1.30 lbs.



> **Ref: SF-FAP-3798 (6,12FT)** <

Adjuster ring provides adjustment
 from 4-6ft.
 1" Polyester webbing has tensile
 strength of 7000lbs.
 Two ends of lanyards is equipped with
 stamped Snap Hook (SF-1406)
 Ideally Designed for work positioning
 at height.
 Meets or Exceeds standards
 ANSI & OSHA
 Weight : 2.10 lbs.



> **Ref: RG 4** <

For use on a 5/8" Anchorage Line of
 Polyester Twisted Rope.
 Gravity Locking System
 Double Security Locking System
 Meets and applicable ANSI & OSHA
 standards



> **Ref: SF-FAP-30201 (25),(50)** <

This Lifeline is made of high strength
 P.P. Rope.
 The dia of the rope is 5/8"
 It is provided with Snap Hook SF-1406
 spliced at one end, and the
 other side has a Stop-Knot
 Available in lengths of 25ft and 50 ft
 Meets or Exceeds
 standards.
 ANSI & OSHA



> **Ref: SF-FAP-30221 (25),(50)** <

This Lifeline is made of high strength
 Polyester Twisted Rope .
 The dia of the rope is 5/8"
 It is provided with Snap Hook SF-
 1406 spliced at one end, and
 the other side has a Stop-Knot
 Available in lengths of 25ft and 50 ft
 Meets or Exceeds
 standards
 ANSI & OSHA



> **Ref: SF-FAP-30222(25),(50)** <

This Lifeline is made of high strength
 Polyester Twisted Rope.
 It comes incorporated with a Shock
 Absorber with Snap Hook
 SF-1406 spliced at one end, and the
 other side has a Stop-Knot.
 The dia of the rope is 5/8"
 Available in lengths of 25ft and 50 ft.
 Meets or Exceeds standards
 ANSI & OSHA

> Ref : SF-FAP-RTSB-25 (D) & SF-FAP-RTSB-50 (D) <

5 Point Full Body Harness our Ref. SF-FAP-155-2D with Pass Thru Buckles.

Roof Anchor our Ref. SF-11 .

25ft & 50ft. length Vertical Life Line made of 5/8" dia P.P. Rope our Ref. SF-FAP-30201(50) having Steel Snap Hook (SF-1406) at one end & Stop knot at the other end.

Rope Grab with Shock Pack our Ref. SF-FAP-30002(6) compatible with the Life line.

Meets or Exceeds ANSI standards Harness complines to ANSI Z359.11-2014, VLA complines to ANSI Z359.1-2007, & Anchor complines to ANSI Z359.18-2017

Weight : 19.14 lbs for 25ft & 25.93 lbs for 50ft.



SF-FAP-155-2D



SF-KB-907



SF-11



+



SF-FAP-30201(50)+SF-FAP-30002(6)

> Ref : SF-FAP-RTSB-25 (G) & SF-FAP-RTSB-50 (G) <

5 Point Full Body Harness our Ref. SF-FAP-155-2G with Tongue Buckles.

Roof Anchor our Ref. SF-11.

25ft & 50ft length Vertical Life Line made of 5/8" dia P.P. Rope our Ref. SF-FAP-30201(25) having Steel Snap Hook (SF-1406) at one end & stop knot on the other end.

Rope Grab with Shock Pack our Ref. SF-FAP-30002(6) compatible with the Life line.

Meets or Exceeds ANSI standards Harness complines to ANSI Z359.11-2014, VLA complines to ANSI Z359.1-2007, & Anchor complines to ANSI Z359.18-2017

Weight : 19.25 lbs for 25ft & 26.04 lbs for 50ft.



SF-FAP-155-2G



SF-KB-907




SF-11



+



SF-FAP-30201(25)+SF-FAP-30002(6)

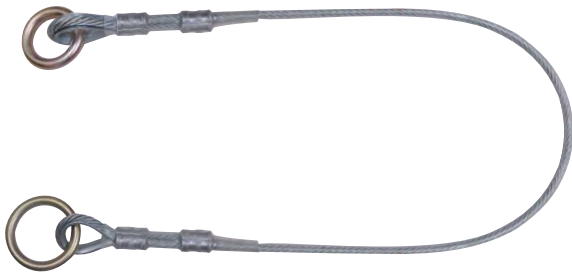
> ANCHORAGE WIRE ROPE SLING WITH BOTH SIDE O-RING <
Ref. SF-AWS04

- Made of (5/16") Galvanized PVC Coated Wire Rope
- Meets or Exceeds ANSI Z 359.18-2017 and OSHA
- Available length 3 ft, 4 ft, & 6 ft or as required


Ref. No.	Length	Weight	Description
SF-AWS04 (3ft)	3 ft	1.25 lbs	Anchorage wire rope sling having one side Forged O-ring and other side small O-ring.
SF-AWS04 (4ft)	4 ft	1.39 lbs	
SF-AWS04 (6ft)	6 ft	1.48 lbs	


> REUSABLE CONCRETE SWIVEL ANCHOR <
Ref. SF-CA02

- Material : Stainless Steel.
- Minimum Breaking Strength : 5000 lbs/23kn.
- Net Weight : 0.70 lbs ± 0.02 lbs.
- Conforms to ANSI Z359.18-2017 typea.


> SLIDING BEAM ANCHOR <
Ref. SF-SBA01

- Material : Aluminium Alloy & stainless steel
- Minimum Breaking strength : 5000 lbs/23kN
- Net Weight : 3.5 lbs ± 0.02 lbs.
- Finish : Clamps, Swivel-Zinc Plated.
- Flanges adjustable from 3.5" to 14".
- Conforms to ANSI Z 359.18-2017

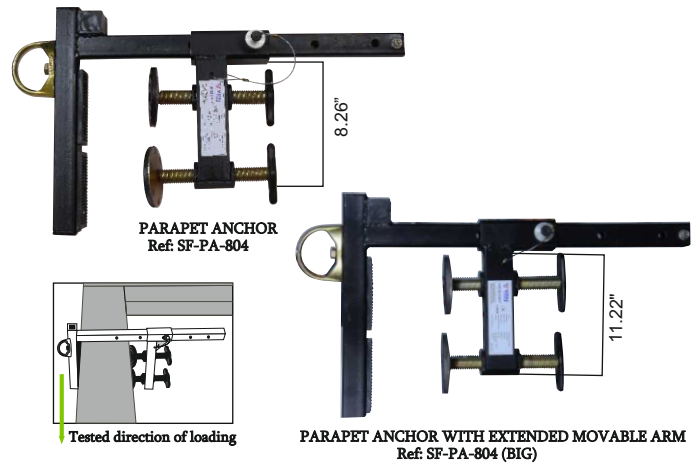

> PARAPET ANCHOR <

- Can be Easily Installed on Parapets of Building
- Material: High Strength Alloy Steel
- Finish: Silver/Golden, Yellow Galvanized
- Minimum Breaking (System) Strength: 5000lbs/ 23 kN
- Net Weight: 19.84 lbs ± 0.02 lbs.
- Min. width of the Parapet on which installation possible: 2.36"
- Max. width of the Parapet on which installation possible: 14.17"
- Conforms to ANSI Z 359.18-2017


Ref: SF-10

Ref: SF-11
> ANCHORAGE CONNECTOR <

- Material: Galvanized Steel with Stamped D-Ring
- Minimum Breaking Strength: 5000 lbs/ 23 kN
- Finish: Powder Coated or Zinc Plated
- Net Weight: 2.390 lbs ± 0.02 lbs
- Conforms to ANSI Z 359.18-2017 TYPE A

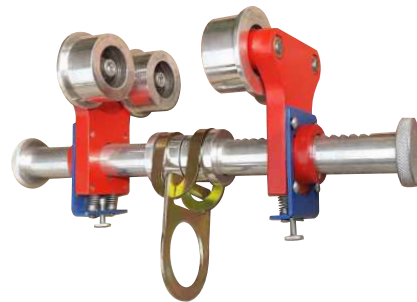
> BEAM ANCHOR TROLLEY <
Ref. SF-BA-803 M (T)

- Material : Aluminium Alloy & stainless steel
- Minimum Breaking strength : 5000 lbs/23kN
- Net Weight : 9.27 lbs ± 0.02 lbs.
- Finish : Beam - Anodized.
- Flanges adjustable from 2.99" to 11.81".
- Conforms to ANSI Z 359.18-2017

Ref. SF-1404 | Steel Swivel Snap Hook with Load Indicator



Ref. SF-1406 | Steel Snap Hook



Ref. SF-1408 | Tie Black Snap Hook



Ref. SF-1101 A | Steel Quarter Turn-locking Karabiner



Ref. SF-1903 A | Aluminium Quarter with Load Locking Karabiner



Ref. SF-1105ATSS | Stainless Steel Triple Action Locking Karabiner



Ref. SF-1509 | Aluminium Rebar Hook



Ref. SF-512 | Aluminium Bulb Type Hook



Ref. SF-1115 | Aluminium Karabiner Triple Lock with Swivel



Ref. SF-1607 | Steel Rebar Hook



Ref. SF-1609 | Twin SRL Connector



Ref. SF-1700 | Twin SRL Connector





SCAN FOR
CORPORATE VIDEO



VIRAJ
=VSPL GROUP=
VIRAJ SYNTEX (P) LTD.

An ISO 9001 : 2015 Certified Company

www.virajsyntex.com

VIRAJ SYNTEX (P) LTD. (VSPL Group) established in 1995 has managed to carve a niche for itself in terms of customer satisfaction and state of the art technology. VSPL Group specializes in the field of Narrow Woven Fabrics & Braided Cords/Ropes , Fall Protection Equipments, Material handling & Load Restraint Systems and Equestrian Products. In India, we are one of the leading suppliers of Narrow Woven Fabrics used in Parachutes and other safety equipments used by the Indian Defence Organisations.

Our Manufacturing set-up is spread over 1,50,000 sq. ft and is equipped with finest and latest weaving, braiding, twisting machines along with continuous dyeing and testing equipments. We are one of the few companies having a complete Vertical Integrated manufacturing process along with complete In house testing of all input raw material till complete finished products which gives us a strong control over quality at every step.

All our systems & process are registered to ISO 9001:2015. ISI, CE, ANSI and OSHA certifications reaffirm our commitment towards values of quality, innovation & fair Business Practices for complete customer satisfaction. VSPL Group has expanded its marketing horizons in Europe, UK, Asia Pacific, Africa, USA, Australia and Middle East.

UNIT-1: Plot No. C-36, UPSIDC Industrial Area, Rooma, Kanpur-209402 (U.P.) India.

Tel : +91 9839508787, 9839811500, 9519999336

UNIT-2: J-27, Panki Industrial Area, Site-III, Kanpur-208022 (U.P.) India.

Tel.: +91 9838075687, 9839803488

Info@virajsyntex.com | info@securefirst.net | info@securelift.net